

符合RoHS

ERON®

No.E-9158U


PRECISION PARALLELS

## 薄型平行块

材质 S50C

热处理 淬火HRC47~53




- 设计高度时考虑了平口钳的钳口深度。
- 厚度薄,适用于工件端面附近的通孔加工。(带台阶型尤为适合)
- 2片1组(※对差:0.01)。

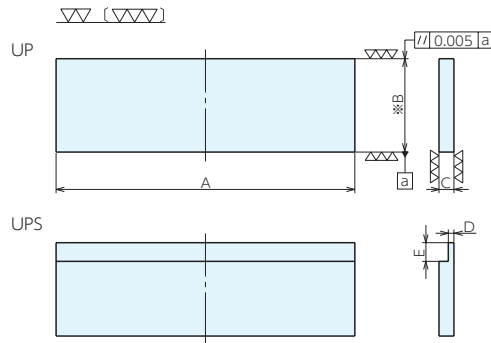

### 规格

通用尺寸			UP(无台阶)			UPS(带台阶)				
A	B	C	订单号	型号	重量kg	订单号	型号	D	E	重量kg
160	30	8	955665	UP1630	0.60	955688	UPS1630	3	10	0.47
160	35	8	955666	UP1635	0.70	955689	UPS1635	3	10	0.58
160	40	8	955667	UP1640	0.80	955690	UPS1640	3	10	0.67
160	45	8	955668	UP1645	0.90	955691	UPS1645	3	10	0.77
160	50	8	955669	UP1650	1.00	955692	UPS1650	3	10	0.87
160	51	8	955670	UP1651	1.03	955693	UPS1651	3	10	0.90
160	52	8	955671	UP1652	1.05	955694	UPS1652	3	10	0.92
160	53	8	955672	UP1653	1.07	955695	UPS1653	3	10	0.94
160	54	8	955673	UP1654	1.09	955696	UPS1654	3	10	0.96
160	55	8	955674	UP1655	1.10	955697	UPS1655	3	10	0.97
160	56	8	955675	UP1656	1.13	955698	UPS1656	3	10	1.02
160	57	8	955676	UP1657	1.15	955699	UPS1657	3	10	1.03
200	40	8	955677	UP2140	1.06	955700	UPS2140	3	10	0.90
200	45	8	955678	UP2145	1.19	955701	UPS2145	3	10	1.03
200	50	8	955679	UP2150	1.32	955702	UPS2150	3	10	1.15
200	55	8	955680	UP2155	1.46	955703	UPS2155	3	10	1.30
200	60	8	955681	UP2160	1.60	955704	UPS2160	3	10	1.44
200	61	8	955682	UP2161	1.62	955705	UPS2161	3	10	1.46
200	62	8	955683	UP2162	1.65	955706	UPS2162	3	10	1.49
200	63	8	955684	UP2163	1.67	955707	UPS2163	3	10	1.50
200	64	8	955685	UP2164	1.70	955708	UPS2164	3	10	1.54
200	65	8	955686	UP2165	1.73	955709	UPS2165	3	10	1.56
200	67	8	955687	UP2167	1.78	955710	UPS2167	3	10	1.62

### 使用例



基准台面

辅助台面

精密平口钳

夹具单元

夹持工装零部件

定位元件

装入式零件

隔振及防振

千斤顶

平台、测量仪

钻床平口钳

机工虎钳

索引

可在主页下载CAD数据、进行库存查询。